


ATTENUATOR

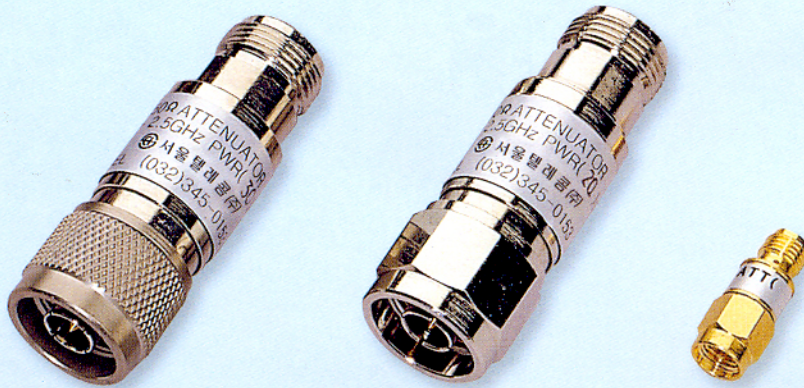

SPECIFICATIONS CHART

PART NO	Frequency Range	VSWR (Max)	Power (Max, W)	Attenuator (dB)	Connector Type	Dimensions (Limm)
S630-201	3 GHz	1.1	0.5 ~ 1	1~30 dB	SMA (Male-Female)	21.3
S630-202	3 GHz	1.2	0.5 ~ 1	1~30 dB	N (Male-Female)	57.0

0. Impedance : 50 ohms
0. operating Temp : -55°C ~ + 125°C