


POWER DIVIDER

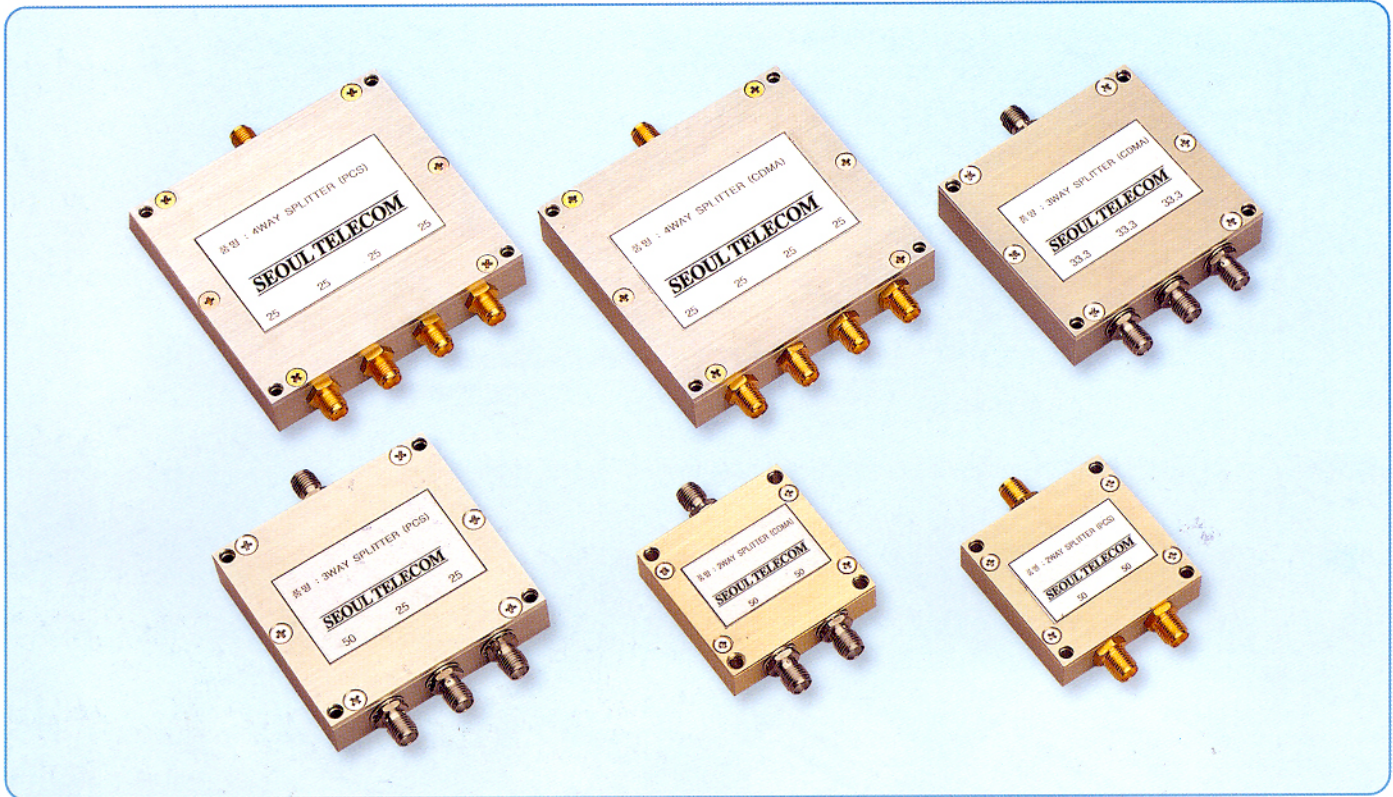

SPECIFICATIONS CHART

PART NO	S630-001	S630-002	S630-004	S630-005	S630-006
Frequency Range	900 MHz	2400 MHz	1900 MHz	2400 MHz	2400 MHz
Insertion Loss	0.3 dB	0.4 dB	0.4 dB	0.4 dB	0.4 dB
V.S.W.R	1.2 : 1	1.2 : 1	1.2 : 1	1.2 : 1	1.2 : 1
Isolation	20 dB	20 dB	20 dB	20 dB	20 dB
A/U	0.2 dB	0.2 dB	0.2 dB	0.3 dB	0.3 dB
P/U	2°	3°	3°	3°	3°
Input Power	1 Watts	-	-	20 Watts	-
Port Connectors	SMA Female	-	-	N Female	-
Channel Mode	2	3	4	2	3
Dimensions	56 × 41 × 14	71 × 58 × 14	83 × 71 × 14	67 × 63 × 22	89 × 93 × 22

0. Impedance : 50 ohm
 0. operating Temp : -55°C ~ + 125°C