


# TERMINATIONS

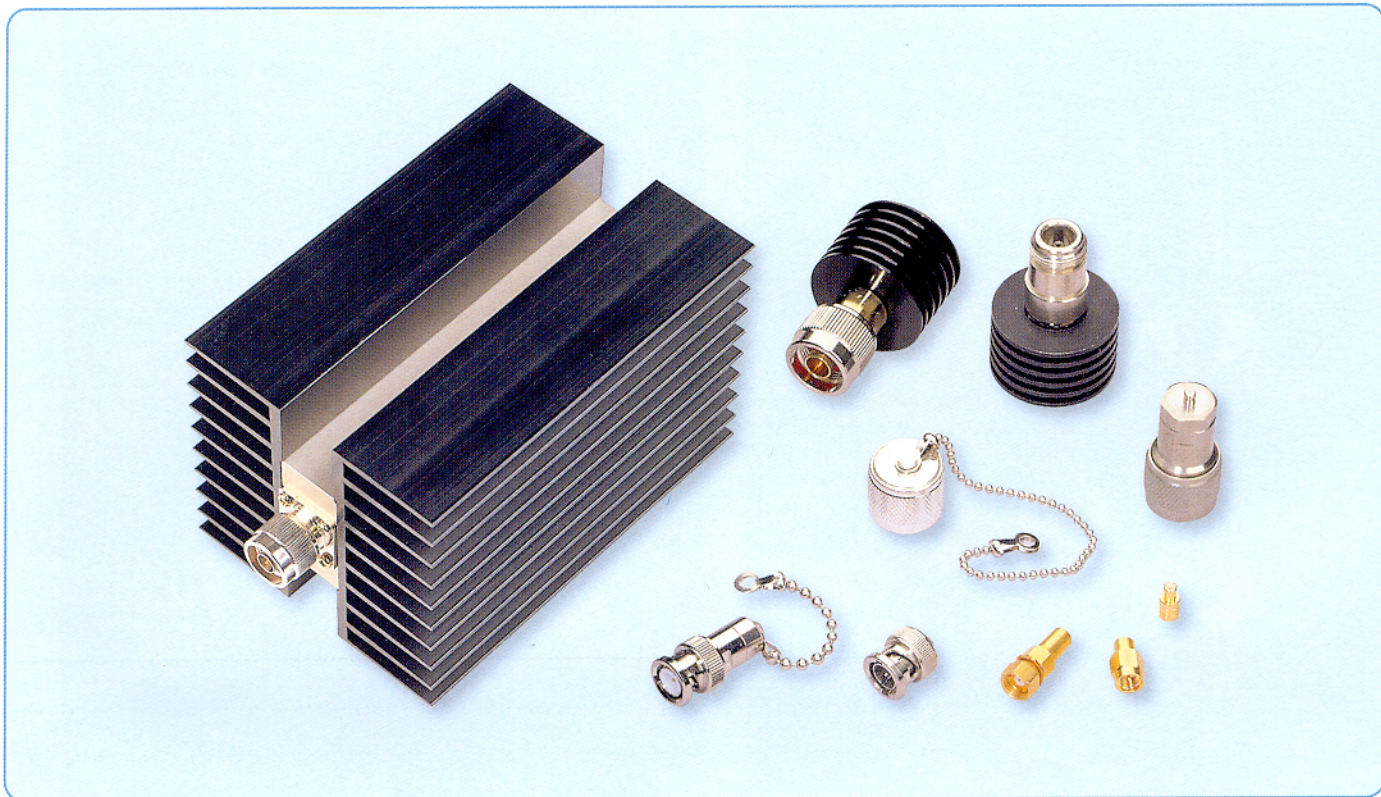

## SPECIFICATIONS CHART

PART NO	Frequency Range	V.S.W.R	Power (Max. W)	Impedance 50 ohm	Connector Type	Dimensions
S630-401	3 GHz	1.1	0.5	50	SMA-Male	9 × 14
S630-402	1 GHz	1.2	1.0	50. 75	BNC-Male	15 × 32
S630-403	3 GHz	1.1	0.5	50	MCX-Male	6 × 11
S630-404	1 GHz	1.2	0.5	75	SMC-Female	10 × 24
S630-405	3 GHz	1.2	5 W	50	N-Male	21 × 41
S630-406	3 GHz	1.2	15 W	50	N-Female	32 × 67
S630-407	3 GHz	1.2	25 W	50	N-Male	43 × 71
S630-408	3 GHz	1.2	150 W	50	N-Male	185 × 106 × 30

0. operating Temp : -55°C ~ + 125°C